


Steel Flexible Joint Flange Adapter

Model FA-CB

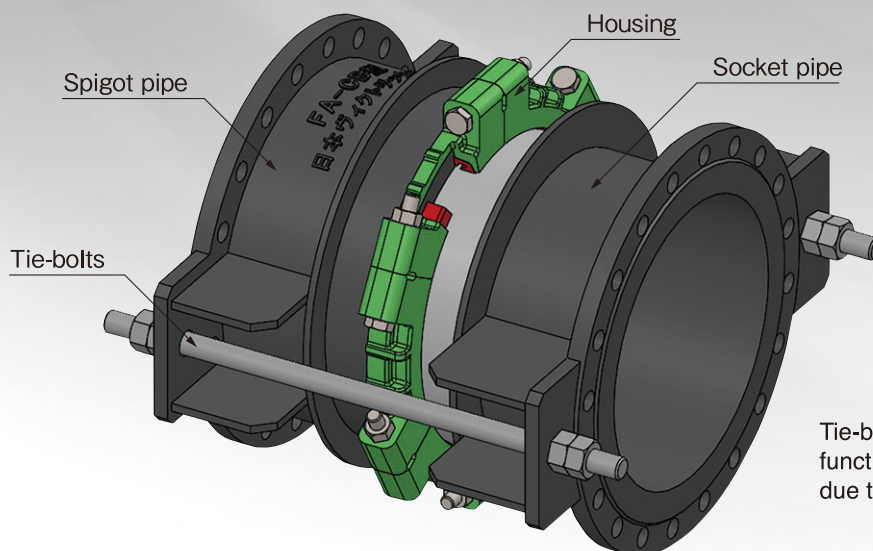

Tie-bolts as a detachment prevention function to tolerate unequal forces due to internal pressure.

Use

In new construction, this will be used as an adjustment pipe to connect valves, pumps, and flow meters to the main. This facilitates removal and installation of equipment during maintenance.

Features


Since no compression is applied to the rubber ring, the only resistance to operation is the frictional resistance force with the pipe, which can be easily adjusted. Adjustment is possible without disassembly.

Specifications

Custom versions with specifications differing from listed below can be produced to order.

- Size 3"/DN80 ~ 96"/DN2400
- Pressure ~2.9MPa (420psi/29bar) or more
- Performance Expansion/90mm ~ 170mm Contraction/50mm ~ 80mm

*Material, rubber ring, coating and joint type are the same as model CL-A.

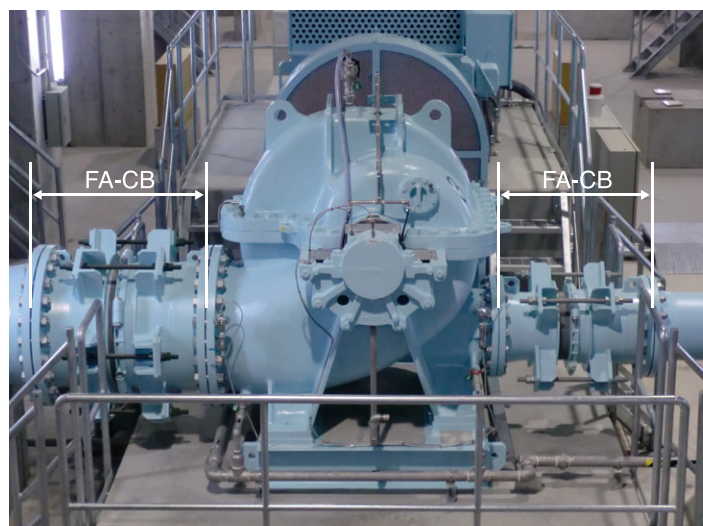

Not only axial length adjustment, but also angle and torsion adjustment are possible.

Contact

+81-52-223-8251

hirano@victaulic.co.jp

<https://victaulic.co.jp>

460-0002
Metlife Nagoya Marunouchi building, 2-20-25,
Marunouchi, Naka-ku, Nagoya-shi, Aichi, Japan

